





























ردیف	مدل	تصویر	مشخصات	قیمت (تومان)
1	HFW1500DP		<p>5MP Starlight HDCVI IR Bullet Camera Max 25 fps@5MP 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 80m, Smart IR IP67, DC12V</p>	3,390,000
2	HFW1500TLP-A	       	<p>5Megapixel CMOS Starlight 20fps@5MP,25/30fps@4MP 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Built-in Mic Max. IR length 80m, Smart IR IP67, DC12V</p>	3,000,000
3	HFW1500TP		<p>5MP Starlight HDCVI IR Bullet Camera Max 25fps@5MP (16:9 video output) CVI/CVBS/AHD/TVI switchable 3.6 mm fixed lens (2.8 mm optional) Max. IR length 30 m, Smart IR IP67, DC12V</p>	2,750,000
4	HFW1509CP		<p>5MP Full-color HDCVI Bullet Camera Max 25 fps@5MP (16:9 video output) 120 dB true WDR, 3D NR 24/7 color imaging 20 m illumination distance CVI/CVBS/AHD/TVI switchable 3.6 mm fixed lens (2.8 mm optional) IP67, 12 V DC</p>	3,450,000
5	B2A51P	       	<p>5Megapixel CMOS Metal Case 20fps@5MP,25/30fps@4MP 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 20m, Smart IR IP67, DC12V</p>	1,890,000
6	B1A51P	       	<p>5Megapixel CMOS Plastic Case 20fps@5MP,25/30fps@4MP 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 20m, Smart IR IP67, DC12V</p>	1,720,000


7	 <p>HFW1400THP-I8</p> 	<p>4Megapixel CMOS 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 80m, Smart IR IP67, DC12V</p>	<p>2,070,000</p>
8	 <p>HFW1400DP</p> 	<p>4Megapixel CMOS 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 80m, Smart IR IP67, DC12V</p>	<p>2,380,000</p>
9	 <p>HFW1400THP-I4</p> 	<p>4Megapixel CMOS 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 40m, Smart IR IP67, DC12V</p>	<p>1,990,000</p>
10	 <p>HFW1400TLP</p> 	<p>4Megapixel CMOS 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 40m, Smart IR IP67, DC12V</p>	<p>1,667,000</p>
11	 <p>HFW1400TP-A</p> 	<p>4Megapixel CMOS 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu, Buil-in Mic Max. IR length 30m, Smart IR IP67, DC12V</p>	<p>2,469,000</p>
12	 <p>HFW1400TP</p> 	<p>4Megapixel CMOS 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 30m, Smart IR IP67, DC12V</p>	<p>2,255,000</p>
13	 <p>HFW1400SP</p> 	<p>4Megapixel CMOS 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 30m, Smart IR IP67, DC12V</p>	<p>1,785,000</p>

<p>14</p> <p>B2A41P</p> <p>Cooper Series</p> 	 <p>4Megapixel CMOS Metal Case 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 20m, Smart IR IP67, DC12V</p>	<p>1,618,000</p>
<p>15</p> <p>B1A41P</p> <p>Cooper Series</p> 	 <p>4Megapixel CMOS Plastic Case 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 20m, Smart IR IP67, DC12V</p>	<p>1,489,000</p>
<p>16</p> <p>HFW1230DP</p> 	 <p>2Megapixel CMOS Starlight 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens(6mm, 8mm optional) HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 80m, Smart IR IP67, DC12V</p>	<p>2,172,000</p>
<p>17</p> <p>HFW1230THP-I4</p> 	 <p>2Megapixel CMOS Starlight 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens(2.8mm, 6mm optional) HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 40m, Smart IR IP67, DC12V</p>	<p>1,985,000</p>
<p>18</p> <p>HFW1239MH-A-LED</p>	 <p>2MP Full-color starlight HDCVI Bullet camera 24/7 color imaging Max. 30 fps@1080p 50 m illumination distance DWDR, 2DNR 3.6 mm fixed lens (6 mm optional) CVI/CVBS/AHD/TVI switchable IP67, DC 12 V</p>	<p>3,650,000</p>
<p>19</p> <p>HFW1239TLMP-LED</p> 	 <p>2MP Full-color starlight HDCVI Bullet camera 1/2.8 inch 2.16 MP CMOS Max. 30 fps@1080p 40 m illumination distance DWDR, 2DNR 3.6 mm fixed lens (2.8 mm optional) CVI/CVBS/AHD/TVI switchable IP67, DC 12 V</p>	<p>2,550,000</p>
<p>20</p> <p>HFW1239TP-A-LED</p> 	 <p>2MP Full-color HDCVI Bullet camera 1/2.8 inch 2 MP CMOS Max. 30 fps@1080p Built-in Mic WDR 130(dB) 20 m illumination distance, 3DNR 3.6 mm fixed lens (2.8 mm optional) CVI/CVBS/AHD/TVI switchable IP67, DC 12 V</p>	<p>2,467,000</p>


<p>21</p> <p>HFW1239TP-LED</p> 	 <p>2MP Full-color HDCVI Bullet camera 1/2.8 inch 2 MP CMOS Max. 30 fps@1080p WDR 130(dB) 20 m illumination distance, 3DNR 3.6 mm fixed lens (2.8 mm optional) CVI/CVBS/AHD/TVI switchable IP67, DC 12 V</p>	<p>2,350,000</p>
<p>22</p> <p>HFW1209CP-A-LED</p> 	 <p>2MP Full-color HDCVI Bullet camera 1/2.8 inch 2 MP CMOS Max. 30 fps@1080p Built-in Mic 20 m illumination distance, 3DNR 3.6 mm fixed lens (2.8 mm optional) CVI/CVBS/AHD/TVI switchable IP67, DC 12 V</p>	<p>1,652,000</p>
<p>23</p> <p>HFW1209CP</p> 	 <p>2MP Full-color HDCVI Bullet camera 1/2.8 inch 2 MP CMOS Max. 30 fps@1080p 20 m illumination distance, 3DNR 3.6 mm fixed lens (2.8 mm optional) CVI/CVBS/AHD/TVI switchable IP67, DC 12 V</p>	<p>1,640,000</p>
<p>24</p> <p>HFW1230SP</p> 	 <p>2MP Starlight HDCVI IR Bullet Camera Starlight Max. 30fps@1080P DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable 3.6mm fixed lens Max. IR length 30m, Smart IR IP67, DC12V OSD Menu</p>	<p>1,400,000</p>
<p>25</p> <p>HFW1220DP</p> 	 <p>2Megapixel CMOS 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 80m, Smart IR IP67, DC12V</p>	<p>1,700,000</p>
<p>26</p> <p>HFW1200DP</p> 	 <p>2Megapixel CMOS 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 80m, Smart IR IP67, DC12V</p>	<p>1,990,000</p>
<p>27</p> <p>HFW1200THP-I8</p> 	 <p>2Megapixel CMOS 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens HD and SD output switchable DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 80m, Smart IR IP67, DC12V</p>	<p>1,740,000</p>

28	HFW1200THP-I4		<p>2Megapixel CMOS 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens HD and SD output switchable DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 40m, Smart IR IP67, DC12V</p>	1,548,000
----	---------------	---	---	-----------




29	HFW1200TLP		<p>2Megapixel CMOS 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 40m, Smart IR IP67, DC12V</p>	1,200,000
----	------------	---	---	-----------




30	HFW1200TP-A		<p>2Megapixel CMOS 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens Built-in Mic HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 30m, Smart IR IP67, DC12V</p>	1,728,000
----	-------------	---	--	-----------




31	HFW1200TP		<p>2Megapixel CMOS 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 30m, Smart IR IP67, DC12V</p>	1,599,000
----	-----------	--	---	-----------




32	HFW1200SP		<p>2Megapixel CMOS 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 30m, Smart IR IP67, DC12V</p>	1,222,000
----	-----------	---	---	-----------


























33	HFW1220SP		<p>2Megapixel CMOS Starlight 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 30m, Smart IR IP67, DC12V</p>	1,292,000
----	-----------	---	---	-----------















34	B2A21P		<p>2Megapixel CMOS Metal Case Max. 30fps@1080P HD and SD output switchable 3.6mm fixed lens Max. IR length 20m, Smart IR Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR IP67, DC12V</p>	1,230,000
----	--------	---	--	-----------





<p>35</p> <p>B1A21P</p> <p>Cooper Series</p> 		<p>2Megapixel CMOS Plastic Case Max. 30fps@1080P HD and SD output switchable 3.6mm fixed lens (6mm optional) Max. IR length 20m, Smart IR Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR IP67, DC12V</p>	<p>1,070,000</p>
<p>36</p> <p>HDW1500EMP-A</p> 		<p>5Megapixel CMOS Max. 30fps@1080P HD and SD output switchable 3.6mm fixed lens Built-in Mic Max. IR length 50m, Smart IR Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR IP67, DC12V</p>	<p>3,100,000</p>
<p>37</p> <p>HDW1509TLQP-LED</p>		<p>5MP Full-color HDCVI Quick-to-install Eyeball Camera Max 25 fps@5MP 120dB true WDR, 3D NR 24/7 color imaging 20 m illumination distance CVI/CVBS/AHD/TVI switchable 3.6 mm fixed lens (2.8 mm optional) IP67, 12 V DC Quick-to-install eyeball saves installation time</p>	<p>3,450,000</p>
<p>38</p> <p>HDW1509TLQP-A</p> <p>Full-Color</p> 		<p>5MP Full-color HDCVI Quick-to-install Eyeball Camera Max 25 fps@5MP HD and SD output switchable 3.6mm fixed lens Built-in Mic 120dB true WDR Max. IR length 20m, Smart IR Support OSD Menu Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR IP67, DC12V</p>	<p>3,600,000</p>
<p>39</p> <p>HDW1500MP</p> 		<p>5Megapixel CMOS Max. 30fps@1080P HD and SD output switchable 3.6mm fixed lens Max. IR length 30m, Smart IR Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR IP67, DC12V</p>	<p>2,700,000</p>
<p>40</p> <p>T2A51P</p> <p>Cooper Series</p> 		<p>5Megapixel CMOS Metal Case Max. 30fps@1080P HD and SD output switchable 3.6mm fixed lens Max. IR length 20m, Smart IR Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR IP67, DC12V</p>	<p>1,890,000</p>

41	<p>T1A51P</p> <p>Cooper Series</p> 		<p>5Megapixel CMOS Plastic Case Max. 30fps@1080P HD and SD output switchable 3.6mm fixed lens Max. IR length 20m, Smart IR Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR IP67, DC12V</p>	1,720,000
42	<p>HDW1400EMP-A</p>  		<p>4Megapixel CMOS 25/30fps@4MP, 25/30fps@1080P 3.6mm fixed lens Built-in Mic DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 50m, Smart IR IP67, DC12V</p>	2,340,000
43	<p>HDW1400MP</p> 		<p>4Megapixel CMOS 25/30fps@4MP, 25/30fps@1080P, 25/30fps@720P 3.6mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 30m, Smart IR IP67, DC12V</p>	1,785,000
44	<p>T2A41P</p> <p>Cooper Series</p> 		<p>4Megapixel CMOS Metal Case 25/30fps@4MP, 25/30fps@1080P 2.8mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 20m, Smart IR IP67, DC12V</p>	1,618,000
45	<p>T1A41P</p> <p>Cooper Series</p> 		<p>4Megapixel CMOS Plastic Case 25/30fps@4MP, 25/30fps@1080P 2.8mm fixed lens DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2DNR HD and SD output switchable OSD Menu Max. IR length 20m, Smart IR IP67, DC12V</p>	1,489,000
46	<p>HDW1200EMP-A</p>  		<p>2Megapixel CMOS 25/30fps@1080P, 25/30/50/60fps@720P 2.8mm fixed lens Built-in Mic HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 50m, Smart IR IP67, DC12V</p>	1,730,000

47	<p>HDW1220EMP-A</p>  <div data-bbox="73 304 535 367">  </div>	<p>2Megapixel CMOS Starlight 25/30fps@1080P, 25/30/50/60fps@720P 3.6mm fixed lens Built-in Mic HD and SD output switchable Support OSD Menu , Starlight DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 50m, Smart IR IP67, DC12V</p>	1,430,000
48	<p>HDW1230MP</p>  <div data-bbox="73 598 535 661">  </div>	<p>2MP Starlight HDCVI IR Eyeball Camera Starlight Max. 30fps@1080P DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR HD and SD output switchable 3.6mm fixed lens Max. IR length 30m, Smart IR IP67, DC12V, OSD Menu</p>	1,350,000
49	<p>HDW1220MP</p>  <div data-bbox="73 892 535 955">  </div>	<p>2Megapixel CMOS 25/30fps@1080P 3.6mm fixed lens HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 30m, Smart IR IP67, DC12V</p>	1,045,000
50	<p>HDW1200MP</p>  <div data-bbox="73 1165 535 1228">  </div>	<p>2Megapixel CMOS 25/30fps@1080P 3.6mm fixed lens HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 30m, Smart IR IP67, DC12V</p>	1,390,000
51	<p>HDW1200TRQP-A</p> 	<p>2Megapixel CMOS Plastic Case 25/30fps@1080P, 25/30/50/60fps@720P 2.8mm fixed lens Built-in Mic HD and SD output switchable Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 25m, Smart IR, DC12V</p>	1,454,000
52	<p>HDW1239TP-A-LED</p>  <div data-bbox="73 1690 349 1795">  </div>	<p>2MP Full-color HDCVI Eyeball Camera 24/7 color imaging, Max. 30 fps@1080p 2.8mm fixed lens Built-in Mic Super Adapt, 130 dB true WDR HD and SD output switchable Support OSD Menu Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR Max. IR LEDs length 40m, Smart IR, DC12V</p>	2,467,000
53	<p>HDW1209TLQP-LED</p>  <div data-bbox="73 1984 349 2089">  </div>	<p>2MP Full-color HDCVI DOME camera 1/2.8 inch 2 MP CMOS Max. 30 fps@1080p 20 m illumination distance, 3DNR 3.6 mm fixed lens (2.8 mm optional) CVI/CVBS/AHD/TVI switchable IP67, DC 12 V</p>	1,620,000

<p>54</p> <p>T2A21P</p> <p>Cooper Series</p> 		<p>2Megapixel CMOS Metal Case Max. 30fps@1080P HD and SD output switchable 3.6mm (& 2.8mm) fixed lens Max. IR length 20m, Smart IR Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR IP67, DC12V</p>	<p>1,230,000</p>
<p>55</p> <p>T1A21P</p> <p>Cooper Series</p> 		<p>2Megapixel CMOS Plastic Case Max. 30fps@1080P HD and SD output switchable 2.8mm fixed lens Max. IR length 20m, Smart IR Support OSD Menu DWDR, Day/Night(ICR), AWB, AGC, BLC, HLC, 2D-DNR DC12V</p>	<p>1,090,000</p>
<p>56</p> <p>SD59230I-HC</p> 		<p>2MP 30x Starlight IR PTZ HDCVI Camera 1/2.8" Starvis CMOS Max. 25/30fps @1080P(1920x1080) & 20/30/50/60fps @720Presolution 4.5mm~135mm 30x optical zoom WDR(120dB), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus Max 400°/s pan speed, 360° endless pan rotation HD and SD switchable Up to 300 presets, 5 auto scan, 8 tour, 5 pattern Audio(in/out) 1 / 1 Built-in 2/1 Alarm in/out IR Distance up to 150m IP66,OSD</p>	<p>CALL</p>
<p>57</p> <p>SD59225I-HC-S2</p> 		<p>2Megapixel Exmor IR CMOS Starlight Max 25/30fps @1080P & 20/30/50/60fps @720P Resolution 4.8mm ~ 120mm 25x optical zoom WDR (120db), Day/Night(ICR), Ultra DNR, Auto iris, Auto focus Max 400°/s pan speed, 360° endless pan rotation Control over coaxial cable 1-channel BNC HDCVI/CVBS output (switchable) Up to 300 presets, 5 auto scan, 8 tour, 5 pattern Built-in 2/1 Alarm in/out 1 Audio Input , RS485 IR Distance up to 150m IP66,OSD</p>	<p>CALL</p>
<p>58</p> <p>SD49225I-HC-LA</p> 		<p>2MP 25x Starlight IR PTZ HDCVI Camera 1/2.8" 2Megapixel Exmor R CMOS 25/30fps@1080P, 25/30/50/60fps@720P Powerful 25x optical zoom,Digital Zoom 16x,Focal Length 4.8mm~120mm Starlight technology 120dB true WDR, 3D DNR Max. 25/30fps@1080P, 25/30/50/60fps@720P IR distance up to 100m PTZ Mode 5 Pattern, 8 Tour, Auto Pan ,Auto Scan Noise Reduction Ultra DNR (2D/3D),IP66</p>	<p>CALL</p>

<p>59</p> <p>XVR1B04-I</p> 		<p>4 Channel Penta-brid 1080N/720P Cooper 1U Digital Video Recorder H.265+/H.265 video compression Supports Full channel AI-Coding Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 5 channels IP camera inputs 2MP; Max 20Mbps Incoming Bandwidth Smart Search and Intelligent Video System Long transmission distance over coax cable Supports 1 SATA HDD, up to 6TB Audio in/out 1/1 RCA 2USB (usb 2.0), P2P Support</p>	<p>2,558,000</p>
<p>60</p> <p>XVR5104HS-X1</p> 		<p>4 Channel Penta-brid 1080P Compact 1U Digital Video Recorder 5MP,4MP,1080P@25/30fps, 720P@50/60fps H.265+/H.265 dual-stream video compression Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 6 channels IP camera inputs, 4+2 each channel up to 6MP; Max 24Mbps Incoming Bandwidth Smart Search and Intelligent Video System Audio In/Out:1/1, RCA USB: 2 USB Ports (2.0) 1 SATA Port, up to 6TB capacity RS485:1 Port, for PTZ Control,P2P Support</p>	<p>4,322,000</p>
<p>61</p> <p>DH-XVR5104HS-I3</p> 		<p>4 Channel Penta-brid 5M-N/1080p Compact 1U 1HDD WizSense Digital Video Recorder 5MP,4MP,1080P@25/30fps, 720P@50/60fps H.265+/H.265 dual-stream video compression · Supports Full-channel AI-Coding Up to 1 channel video stream (analog channel) Perimeter Protection Up to 4 channels video stream (analog channel) SMD Plus Up to 1 channel video stream (analog channel) human face recognition Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 6 channels IP camera inputs 6MP; Max 32Mbps Incoming Bandwidth Smart Search and Intelligent Video System Supports 1 SATA HDD, up to 6TB USB: 2 USB Ports (1 USB 2.0 + 1 USB 3.0) RS485:1 Port, for PTZ Control,P2P Support 1 Audio Input / 1 Audio Output</p>	<p>4,850,000</p>
<p>62</p> <p>XVR5104HS-4KL-I3</p>		<p>4 Channel Penta-brid 5MP Compact 1U 1HDD WizSense Digital Video Recorder H.265+/H.265 dual-stream video compression Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 8 channels IP camera inputs, each channel up to 8MP; Max 64 Mbps incoming bandwidth 1 Audio Input / 1 Audio Output 1 SATA Port , Up to 10 TB HDMI , VGA RS485 for PTZ support 2*USB 2.0 10/100 Mbps LAN Interface P2P Support</p>	<p>6,530,000</p>


63	XVR-1B08-I		<p>8 Channel Penta-brid 1080N/720P Cooper 1U Digital Video Recorder H.265+/H.265 video compression Supports HDCVI/AHD/TVI/CVBS/IP video inputs Supports Full channel AI-Coding Max 10 channels IP camera inputs,8+2 each channel up to 6MP; Max 40Mbps Incoming Bandwidth Long transmission distance over coax cable Supports 1 SATA HDD, up to 6TB Smart Search and Intelligent Video System 1 Audio Input / 1 Audio Output HDMI , VGA 2*USB 2.0 10/100 Mbps LAN Interface P2P Support</p>	3,297,000
----	------------	---	--	-----------



64	DH-XVR5108HS-I3		<p>8 Channel Penta-brid 5M-N/1080p Compact 1U 1HDD WizSense Digital Video Recorder 5MP,4MP,1080P@25/30fps, 720P@50/60fps H.265+/H.265 dual-stream video compression · Supports Full-channel AI-Coding Up to 1 channel video stream (analog channel) Perimeter Protection Up to 8 channels video stream (analog channel) SMD Plus Up to 1 channel video stream (analog channel) human face recognition Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 12 channels IP camera inputs 6MP; Max 64Mbps Incoming Bandwidth Smart Search and Intelligent Video System Supports 1 SATA HDD, up to 10TB USB: 2 USB Ports (1 USB 2.0 + 1 USB 3.0) RS485:1 Port, for PTZ Control,P2P Support 1 Audio Input / 1 Audio Output</p>	7,800,000
----	-----------------	---	--	-----------



65	XVR5108H-4KL-I2		<p>8 Channel Penta-brid 4K Mini 1U Digital Video Recorder 5MP,4MP,1080P@25/30fps, 720P@50/60fps H.265+/H.265 dual-stream video compression Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 16 channels IP camera inputs, each channel up to 8MP; Max 128Mbps Incoming Bandwidth Supports Full channel AI-Coding Up to 2 channels video stream (analog channel) Perimeter Protection Up to 8 channels video stream (analog channel) SMD Plus Up to 2 channels video stream (analog channel) human face recognition Smart Search and Intelligent Video System Supports 1 SATA HDD, up to 10TB USB: 1 USB 2.0 1 USB 3.0 RS485:1 Port, for PTZ Control,P2P Support 1 Audio Input / 1 Audio Output</p>	9,428,000
----	-----------------	---	--	-----------

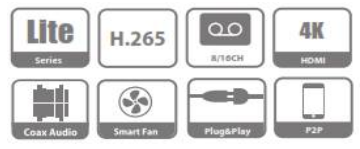

NEW

66	XVR5108HS-4KL-I3		<p>8 Channel Penta-brid 5M-N/1080p Compact 1U 1HDD WizSense Digital Video Recorder 8 Channels Penta-brid 4K-N/5MP Compact 1U 1HDD WizSense Digital Video Recorder 5MP,4MP,1080P@25/30fps, 720P@50/60fps H.265+/H.265 dual-stream video compression · Supports Full-channel AI-Coding Up to 8 channels video stream (analog channel) Perimeter Protection Up to 8 channels video stream (analog channel) SMD Plus Up to 2 channels video stream (analog channel) human face recognition Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 16 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth Smart Search and Intelligent Video System Supports 1 SATA HDD, up to 16TB USB: 2 USB Ports (1 USB 2.0 + 1 USB 3.0) RS485:1 Port, for PTZ Control,P2P Support 1 Audio Input / 1 Audio Output</p>	11,400,000
----	------------------	---	--	------------

Wiz Sense

67	XVR1B16-I		<p>16 Channel Penta-brid 1080N/720P Compact 1U Digital Video Recorder H.265+/H.265 dual-stream video compression Supports HDCVI/AHD/TVI/CVBS/IP video inputs Supports Full-channel AI-Coding Max 18 channels IP camera inputs, each channel up to 6MP; Max 64Mbps Incoming Bandwidth Long transmission distance over coax cable Supports 1 SATA HDD, up to 6TB 1 Audio Input / 1 Audio Output HDMI , VGA,2*USB 2.0 Smart Search and Intelligent Video System 10/100 Mbps LAN Interface P2P Support</p>	6,567,000
----	-----------	---	---	-----------

Wiz Sense

68	DH-XVR5116HS-I3		<p>16 Channel Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense Digital Video Recorder 5MP, 4MP, 1080p@25/30 fps, 720p@50/60 fps, 720p@25/30 fps H.265+/H.265 dual-stream video compression Max 24 channels IP camera inputs, each channel up to 6MP; Max 128Mbps incoming bandwidth Supports Full-channel AI Coding Supports HDCVI/AHD/TVI/CVBS/IP video inputs 1 SATA Port, up to 16TB for a single HDD 1 HDMI ,1 VGA P2P Support</p>	11,600,000
----	-----------------	---	---	------------

69	DH-XVR5216AN-I2		<p>16 Channel Penta-brid 5M-N/1080P 1U 2HDDs WizSense Digital Video Recorder 5MP,4MP,1080P@25/30fps, 720P@50/60fps H.265+/H.265 dual-stream video compression Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 24 channels IP camera inputs, each channel up to 6MP; Max 128Mbps Incoming Bandwidth Supports Full channel AI-Coding Up to 2 channels video stream (analog channel) Perimeter Protection Up to 16 channels video stream (analog channel) SMD Plus Up to 2 channels video stream (analog channel) human face recognition Smart Search and Intelligent Video System 1/1 Audio In/Out 2 SATA Port , Up to 20 TB(2*10TB) HDMI , VGA RS485 for PTZ support 2 USB Ports (1 USB 2.0 . 1 USB 3.0)</p>	12,300,000
----	-----------------	---	---	------------

Wiz Sense



ردیف	مدل	تصویر	مشخصات	قیمت (تومان)
70	DH-XVR5216AN-I3		<p>16 Channel Penta-brid 5M-N/1080P 1U 2HDDs WizSense Digital Video Recorder 5M-N (1 fps-10 fps); 4M-N/1080p (1 fps-15 fps); 1080N/720p/960H/D1/CIF (1 fps-25/30 fps) Max 24 channels IP camera inputs, each channel up to 6MP; Max 128Mbps incoming bandwidth H.265+/H.265 dual-stream video compression Supports Full-channel AI Coding Supports HDCVI/AHD/TVI/CVBS/IP video inputs 1 HDMI, 1 VGA 2 SATA Ports, up to 16TB for a single HDD P2P Support</p>	14,350,000
71	XVR5216AN-4KL-I3		<p>16 Channels Penta-brid 4K-N/5MP 1U 2HDDs WizSense Digital Video Recorder 5MP@(1-12fps); 4K-N/4MP/3MP@(1-15fps); 4M-N/1080P/720P/960H/D1/CIF(1fps-25/30fps); Sub stream: 960H@(1fps-15fps); D1/CIF@(1 fps-25/30fps) Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth. H.265+/H.265 dual-stream video compression Supports Full-channel AI Coding Supports HDCVI/AHD/TVI/CVBS/IP video inputs 1 HDMI, 1 VGA 2 SATA Ports, up to 16TB for a single HDD P2P Support</p>	20,000,000
72	XVR5232AN-I2	 <p>Wiz Sense</p>	<p>32 Channel Penta-brid 5M-N/1080P 1U 2HDDs WizSense Digital Video Recorder 5MP,4MP,1080P@25/30fps, 720P@50/60fps H.265+/H.265 dual-stream video compression Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 32 channels IP camera inputs, each channel up to 6MP; Max 128Mbps Incoming Bandwidth Up to 2 channels video stream (analog channel) Perimeter Protection Up to 16 channels video stream (analog channel) SMD Plus Up to 2 channels video stream (analog channel) human face recognition Smart Search and Intelligent Video System 1/1 Audio In/Out 2 SATA Port , Up to 20 TB(2*10TB) HDMI , VGA RS485 for PTZ support 2 USB Ports (1 USB 2.0 , 1 USB 3.0) P2P Support</p>	21,100,000
73	XVR5232AN-I3	 <p>Wiz Sense</p>	<p>32 Channels Penta-brid 5M-N/1080P 1U 2HDDs WizSense Digital Video Recorder 5MP,4MP,1080P@25/30fps, 720P@50/60fps H.265+/H.265 dual-stream video compression Supports HDCVI/AHD/TVI/CVBS/IP video inputs Max 32 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth. Up to 4 channels video stream (analog channel) Perimeter Protection. Up to 16 channels video stream (analog channel) SMD Plus. Up to 2 channels video stream (analog channel) human face recognition. Smart Search and Intelligent Video System 1/1 Audio In/Out 2 SATA Port , Up to 20 TB(2*16TB) HDMI , VGA RS485 for PTZ support 2 USB Ports (1 USB 2.0 , 1 USB 3.0) P2P Support</p>	21,955,000

74

XVR5432L-X



32 Channel Penta-brid 1080P 1.5U Digital Video Recorder
 H.265+/H.265 dual-stream video compression
 Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 Max 32 channels IP camera inputs, each channel up to 8MP; Max 128Mbps incoming bandwidth
 First 16 channels support Tripwire & Intrusion; First 2 channels support Object Abandoned & Missing
 Supports HDMI2 for spot output
 Audio In/Out: 4/1, BNC
 Two-way Talk: 1 Mic In, 1 Mic Out, BNC
 4 SATA Ports, up to 10TB capacity for each disk, eSATA 1 Port
 RS485: 1 Port, for PTZ Control
 Alarm In/Out 16/6, 2 HDMI 1 VGA, 1 TV,, 1 Lan(1000)

CALL

75

XVR5832S-X



32 Channel Penta-brid 1080P 2U Digital Video Recorder
 H.265+/H.265 dual-stream video compression
 Supports HDCVI/AHD/TVI/CVBS/IP video inputs
 Max 32 channels IP camera inputs, each channel up to 8MP; Max 128Mbps incoming bandwidth
 First 16 channels support Tripwire & Intrusion; First 2 channels support Object Abandoned & Missing
 Supports HDMI2 for spot output
 8 SATA Ports, up to 10TB capacity
 Audio In/Out: 16 Audio In, 1 Audio Out, BNC
 Two-way Talk: 1 Mic In, 1 Mic Out, BNC
 2 USB 2.0, 2 USB 3.0
 RS485: 1 Port, for PTZ Control
 Alarm In/Out 16/6, 2 HDMI 1 TV, 1 Lan(1000)

CALL

76

DH-PFM906




7" IPS HD retina capacitive touch screen(1920*1200);
 Support IP, HDCVI/AHD/TVI/CVBS, SDI;
 Support HDMI Input/Output;
 Support PoE, DC12V 2A and USB5V 2A power out;
 Build-in 37Wh big capacity polymer lithium ion battery , which can last 10 hours for normal use;
 Support TDR(network cable/coaxial cable), UTP cable tester and hunting, optical cable VFL;
 Support digital multi-meter function;
 Support optical power meter test function

CALL

77

DH-PFA103



Aesthetic design
 Material: aluminum
 Hanging mount adapter
 Dimension $\Phi 133\text{mm} \times 37\text{mm}$ ($\Phi 5.23'' \times 1.46''$)
 Pipe Thread G1 1/2"
 Load Bearing 3.0kg(6.61lb)
 Weight 0.13kg(0.29lb)
 Color White

260,000

78

DH-PFA120



Aesthetic design
 Material: aluminum
 Water-proof junction box
 Dimension 115.0mmx160.0mmx38.8mm
 ($4.53'' \times 6.30'' \times 1.53''$)
 Inch Thread M20(G1/2")
 Load Bearing 7.0kg(15.43lb)
 Weight 0.53kg(1.17lb)
 Color White

260,000

ردیف	مدل	تصویر	مشخصات	قیمت (تومان)
79	DH-PFB300C		<p>Material: Aluminum & PC Ceiling Mount Bracket Neat & Integrated design Dimension (W x H x D) $\Phi 133.6\text{mm} \times 235.5\text{mm}$ Pipe Thread G1 1/2" Operating Temperature $-40^{\circ}\text{C} \sim 60^{\circ}\text{C}$ Humidity 0~90% RH Load Bearing 7.0Kg</p>	320,000
80	DH-PFB300S		<p>Material: Aluminum Wall Mount Bracket Neat & Integrated design Dimension (W x H x D) 228mm(W) x 150mm(H) x 160mm(D) Pipe Thread 1" PF Operating Temperature $-40^{\circ}\text{C} \sim 60^{\circ}\text{C}$ Humidity 0~90% RH Load Bearing 3.0Kg</p>	338,000
81	DH-PFA110		<p>Material: Aluminum Mount Adapter Neat & Integrated design Dimension (W x H x D) $\Phi 59\text{mm} \times 53\text{mm}$ Pipe Thread G1 1/2" Operating Temperature $-40^{\circ}\text{C} \sim 60^{\circ}\text{C}$ Humidity 0~90% RH</p>	150,000

کلیه محصولات با برچسب گارانتی طلایی رسترسرویس ارائه میشود

